

COMFOflex®

## WELDING GLOVES




Cotton lining



Foam lining



COMFOflex® lining

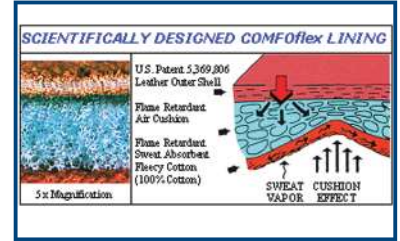


COMFOflex®

### 10-2000



S, L, XL, XXL  
LH  
L/18"



35 cm.  
46 cm. (L/18")

- A-grade cow split leather
- Hand COMFOflex® lined
- Cuff cotton lined
- Wide body model
- Size L also available in Left Hand only pairs (LH) and 18" (46 cm.)



95%

KEVLAR® 4 ply + 5 ply

COMFOflex®

EN 12477 (2001+A1:2005) TYPE A  
TÜV BP 60153044 0001  
TÜV 60399937 003



41334X



3143X




KAT II

Ω ELECTROSTATIC TESTED Ω

### 10-2178



L



35 cm.

- Same features like the 10-2000 glove
- One finger model



95%

KEVLAR® 4 ply

COMFOflex®

EN 12477 (2001+A1:2005) TYPE A  
TÜV BP 60153044 0002  
TÜV 60399937 003



41334X



4143X




KAT II

Ω ELECTROSTATIC TESTED Ω

### 10-2087



L, XL



35 cm.

- A-grade cow shoulder split leather
- Hand full COMFOflex® lined
- Cuff cotton lined
- Wide body model



95%

KEVLAR® 4 ply + 5 ply

COMFOflex®

EN 12477 (2001+A1:2005) TYPE A  
TÜV BP 60152704 0001  
TÜV 60400422 002



413X4X



3143X




KAT II

## COMFOflex® WELDING GLOVES

10-2900-A



L, XL




36 cm.

- A-grade cow split leather
- Hand COMFOflex® and wool lined
- Cuff flame retardant lined
- Wide body model



70%

KEVLAR® 4 ply + 5 ply




EN 12477 (2001+A1:2005) TYPE A  
TÜV BP 60152711 0001  
TÜV 60400498 002



10-2655



M, L, XL, XXL



37 cm.

- Hand bison leather
- Cuff split cowhide
- Inner back of the hand COMFOflex® lined
- Cuff flame retardant lined
- **CHROMIUM < 2 mg./kg.**



30%

KEVLAR® 4 ply + 5 ply



ThunderingBison™


EN 12477 (2001+A1:2005) TYPE A  
TÜV BP 60152714 0001  
TÜV 60403193 003



10-2850



L, XL



36 cm.

- Grain and split deerskin
- Backhand COMFOflex® lined and inner cuff flame retardant lined
- Highest comfort level



30%

KEVLAR® 4 ply + 5 ply



DEERSOsoft®


EN 12477 (2001+A1:2005) TYPE A  
TÜV BP 60152709 0001  
TÜV 60400523 002



10-2050



S, M, L,  
XL, XXL



34 cm.

- Hand made of white grain cowhide and black split cowhide
- COMFOflex® lining at the back of the glove
- Flame retardant fabric 520 gr./m<sup>2</sup> for the cuff
- This glove is sewn with 3 ply Dupont™ KEVLAR®



20%

KEVLAR® 3 ply



Arc Knight®

EN 12477 (2001+A1:2005) TYPE A  
TÜV BP 60152673 0001  
TÜV 60403196 002



**NEW**


**COMFOflex®**

## WELDING GLOVES

**10-2750**



L, XL, XXL



36 cm.

- A-grade cow grain leather
- Backhand **COMFOflex®** lined and cuff cotton lined
- Back palm reversed grain (suede)
- Oil and water resistant
- Excellent quality and comfortable to wear



30%

KEVLAR® 4 ply + 5 ply



**STEERSOstuff®**

EN 12477 (2001+A1:2005) TYPE A  
TÜV BP 60152710 0001  
TÜV 60400759 002




Ω ELECTROSTATIC TESTED Ω

**10-2755**



L, XL



36 cm.

- Combined features:
- on the back of our 10-2385
- and the innerhand of the 10-2750 with extra comfort padges
- Oil and water resistant
- Excellent quality and comfortable to wear



30%

KEVLAR® 4 ply + 5 ply



**COMFOflex®**


EN 12477 (2001+A1:2005) TYPE A  
TÜV BP 60152707 0001  
TÜV 60403152 003



**10-2385**



L, XL, XXL



35 cm.

- A-grade cow side split leather
- Hand full **COMFOflex®** lined and cuff full flame retardant lined
- Wide body model
- Aluminized back is designed to reflect radiant heat and has a layer of split deerskin in between the back and **COMFOflex®** lining



35%

KEVLAR® 4 ply



**COMFOflex®**

EN 12477 (2001+A1:2005) TYPE A  
TÜV BP 60152705 0001  
TÜV 60400780 002



+



=



44-3006LB, 44-3008LB, 44-3009BF:  
see page 39