


Lava Brown™ CLOTHING



Lava Brown™ products are made of high quality A-grade side split cow leather

44-7300 Jacket full leather

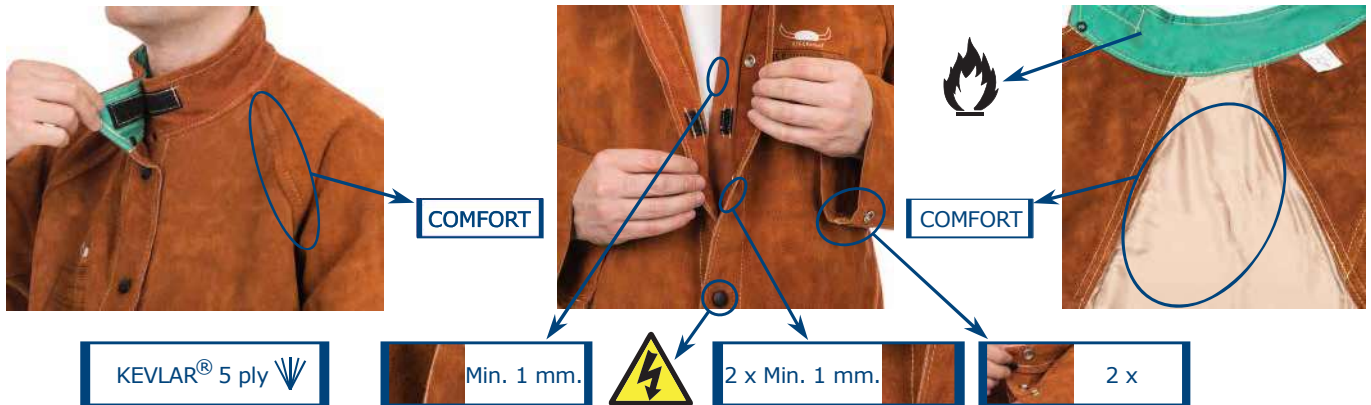

- A-grade side split cow leather
- KEVLAR® 5 ply
- Leather thickness: min. 1 mm.



EN ISO 11611:2015
CLASS 2/A1+A2
TÜV BP 60126846 0001
TÜV 21285003 001



**EN ISO 11611:2015
CLASS 2/A1+A2**

	↕	
44-7300M	76 cm.	100 cm.
44-7300L	81 cm.	112 cm.
44-7300XL	86 cm.	124 cm.
44-7300XXL	91 cm.	136 cm.
44-7300XXXL	96 cm.	148 cm.
44-7300XXXXL	96 cm.	160 cm.

44-7300/P Jacket with flame retardant back



- A-grade side split cow leather
- KEVLAR® 5 ply
- Leather thickness: min. 1 mm.
- Back: flame retardant cotton 315 gr/m²



EN ISO 11611:2015
CLASS 1/A1+A2
TÜV BP 60127076 0001
TÜV 21280500 001



**EN ISO 11611:2015
CLASS 1/A1+A2**

	↕	
44-7300M/P	76 cm.	100 cm.
44-7300L/P	81 cm.	112 cm.
44-7300XL/P	86 cm.	124 cm.
44-7300XXL/P	91 cm.	136 cm.
44-7300XXXL/P	96 cm.	148 cm.

Lava Brown™ CLOTHING

44-7300/P-AQ Ladies jacket with flame retardant back



- A-grade side split cow leather
- KEVLAR® 5 ply
- Leather thickness: min. 1 mm.
- Back: flame retardant cotton 315 gr./m²



EN ISO 11611:2015
CLASS 1/A1+A2
TÜV BP 60127076 0001
TÜV 21280500 001



**EN ISO 11611:2015
CLASS 1/A1+A2**

	↕	
44-7300S/P-AQ	76 cm.	98 cm.
44-7300M/P-AQ	76 cm.	110 cm.
44-7300L/P-AQ	81 cm.	120 cm.
44-7300XL/P-AQ	86 cm.	130 cm.

44-7800 Cape sleeve



- A-grade side split cow leather
- KEVLAR® 5 ply
- Leather thickness: min. 1 mm.



EN ISO 11611:2015
CLASS 2/A1+A2
TÜV BP 60126846 0001
TÜV 21285003 001



**EN ISO 11611:2015
CLASS 2/A1+A2**

	↕	
44-7800M	100 cm.	
44-7800L	112 cm.	
44-7800XL	124 cm.	
44-7800XXL	136 cm.	
44-7800XXXL	148 cm.	

44-78.. Apron for cape sleeves



- A-grade side split cow leather
- KEVLAR® 5 ply
- Leather thickness: min. 1 mm.



EN ISO 11611:2015
CLASS 2/A1+A2
TÜV BP 60126846 0001
TÜV 21285003 001



**EN ISO 11611:2015
CLASS 2/A1+A2**

	↕	↔
44-7820	51 cm.	56 cm.
44-7828	71 cm.	56 cm.
44-7836	91 cm.	56 cm.
44-7836XL	120 cm.	80 cm.



Lava Brown™ CLOTHING

44-7248

Pants with breast protection and open back

44-7440

Pants with open back



122 cm.

- A-grade side split cow leather
- KEVLAR® 5 ply
- Leather thickness: min. 1 mm.



102 cm.



STEERSOstuff®

EN ISO 11611:2015
CLASS 2/A1+A2
TÜV BP 60126846 0001
TÜV 21285003 001



**EN ISO 11611:2015
CLASS 2/A1+A2**

44-7440/7600

Pants with closed back



- A-grade side split cow leather
- KEVLAR® 5 ply
- Leather thickness: min. 1 mm.



STEERSOstuff®

EN ISO 11611:2015
CLASS 2/A1+A2
TÜV BP 60126846 0001
TÜV 21285003 001



**EN ISO 11611:2015
CLASS 2/A1+A2**

44-7440/7600M
44-7440/7600L
44-7440/7600XL
44-7440/7600XXL
44-7440/7600XXXL

110 cm.
112 cm.
116 cm.
122 cm.
128 cm.

44-7440/7648

Pants with breast protection and closed back, bib and brace



- A-grade side split cow leather
- KEVLAR® 5 ply
- Leather thickness: min. 1 mm.



STEERSOstuff®

EN ISO 11611:2015
CLASS 2/A1+A2
TÜV BP 60126846 0001
TÜV 21285003 001



**EN ISO 11611:2015
CLASS 2/A1+A2**

44-7440/7648M
44-7440/7648L
44-7440/7648XL
44-7440/7648XXL
44-7440/7648XXXL
44-7440/7648XXXXL

136 cm.
140 cm.
144 cm.
148 cm.
152 cm.
156 cm.

Lava Brown™ CLOTHING

44-71.. Apron



- A-grade side split cow leather
- KEVLAR® 5 ply
- Leather thickness: min. 1 mm.
- Self-balancing strap system

	↕	↔
44-7124	60 cm.	60 cm.
44-7136	91 cm.	60 cm.
44-7142	107 cm.	60 cm.
44-7142 W	107 cm.	80 cm.
44-7148	122 cm.	60 cm.
44-7148 W	122 cm.	80 cm.

COMFORT



44-7124
60x60 cm.



STEERSOtuff®

EN ISO 11611:2015
CLASS 2/A1+A2
TÜV BP 60126846 0001
TÜV 21285003 001



**EN ISO 11611:2015
CLASS 2/A1+A2**

44-7023 Sleeves



- A-grade side split cow leather
- KEVLAR® 5 ply
- Leather thickness: min. 1 mm.
- Balancing strap system

44-7023

↕
58 cm.



STEERSOtuff®

EN ISO 11611:2015
CLASS 2/A1+A2
TÜV BP 60126846 0001
TÜV 21285003 001



**EN ISO 11611:2015
CLASS 2/A1+A2**

44-7028 Heavy duty arm guard (piece)



- Heavy duty
- A-grade side split cow leather
- KEVLAR® 5 ply
- Leather thickness: min. 1 mm.
- COMFOflex® lining used
- Hook and loop closure
- Inside 520 gr./m² flame retardant fabric
- See for extension 44-7114EXT (page 18)

44-7028

↕
35 cm.



↻
32-41 cm.



↻
35-45 cm.



STEERSOtuff®

EN ISO 11611:2015
CLASS 2/A1+A2
TÜV BP 60126846 0001
TÜV 21285003 001



**EN ISO 11611:2015
CLASS 2/A1+A2**

Lava Brown™ CLOTHING

44-7106 Spats for shoe protection



- A-grade side split cow leather
- KEVLAR® 5 ply
- Leather thickness: min. 1 mm.
- With under the shoe an elastic strap to secure shoe top cover

44-7106

33-43 cm. 15 cm.



EN ISO 11611:2015
CLASS 2/A1+A2
TÜV BP 60126846 0001
TÜV 21285003 001



**EN ISO 11611:2015
CLASS 2/A1+A2**

44-7114 Spats for leg and shoe protection



- A-grade side split cow leather
- KEVLAR® 5 ply
- Leather thickness: min. 1 mm.
- With bendable insert at shin and shoe top to allow shape formation
- See for extension 44-7114EXT

44-7114

37-47 cm. 36 cm.



EN ISO 11611:2015
CLASS 2/A1+A2
TÜV BP 60126846 0001
TÜV 21285003 001



**EN ISO 11611:2015
CLASS 2/A1+A2**

44-7114EXT Diameter extension for 44-7114 and 44-7028



- A-grade side split cow leather
- KEVLAR® 5 ply
- Leather thickness: min. 1 mm.
- 15 cm. wide extension for 44-7114 and 44-7028

44-7114EXT + 44-7114 = 52-62 cm.

44-7114EXT

15 cm.



EN ISO 11611:2015
CLASS 2/A1+A2
TÜV BP 60126846 0001
TÜV 21285003 001



**EN ISO 11611:2015
CLASS 2/A1+A2**